

# Ice Bath Personal

**all measures must be verified under the manufacturer's responsibility**

project		Ice Bath Personal	
dwg title		TECHNICAL DRAWING	
date	20/06/2024	dgn n.	<b>standard connections</b>
revision			
drawn by	i.p.	scale	1:50




wellness concept

via stazione, 25 38030 ziano di fiemme (tn)  
telefono 0462-571881 fax 0462-571899 internet www.starpool.it e-mail info@starpool.it

## area tecnica

via stazione, 25 38030 ziano di fiemme (tn)  
telefono 0462-570233 fax 0462-570240 e-mail progetti@starpool.it


In compliance with the law, this document cannot be reproduced or communicated to third parties without prior authorisation of the owner

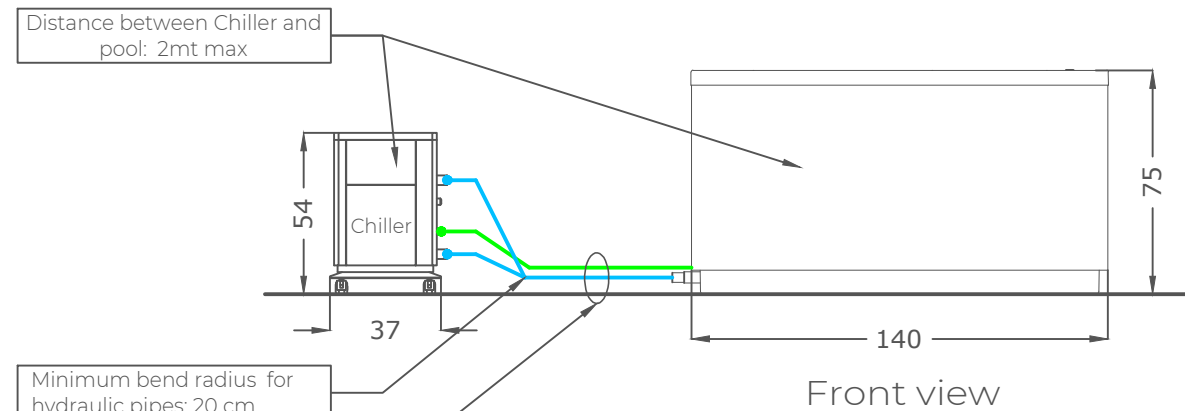

Minimum bend radius for hydraulic pipes: 20 cm

Connections on the finished floor

Clear area around the chiller: 40cm

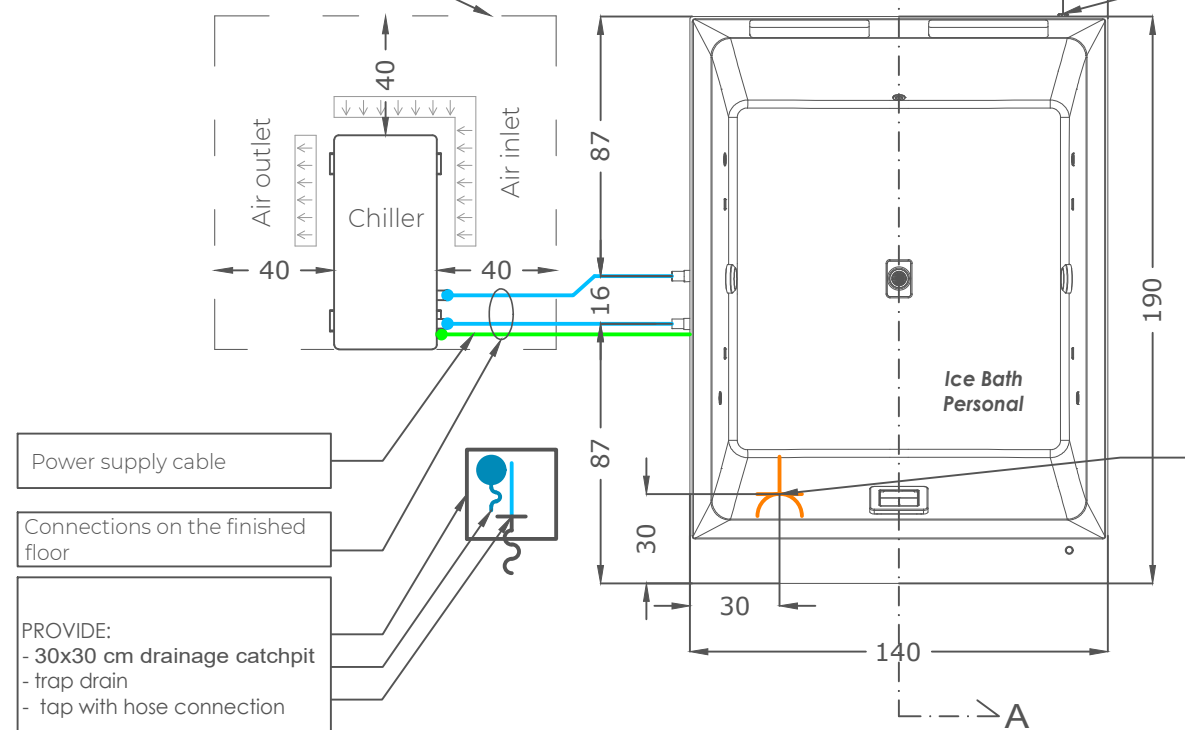


Power supply cable

Connections on the finished floor

PROVIDE:  
- 30x30 cm drainage catchpit  
- trap drain  
- tap with hose connection

The hydraulic connections to be provided inside the premise are recommended but not mandatory

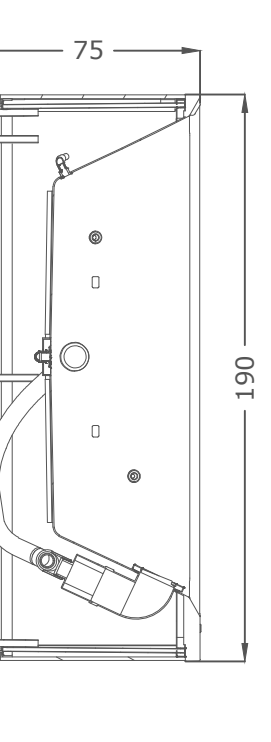

### ICE BATH PERSONAL TECHNICAL DATA

EXTERNAL DIMENSIONS	190W x 140D x 75H cm
NET WEIGHT	220 kg
OPERATING WEIGHT	770 kg
WATER CAPACITY	550 lt
POWER SUPPLY charged to client	16A - 230 Vac con Magn+Diff 16A/30 mA
LOAD-BEARING CAPACITY	3600 N/m <sup>2</sup>
WATER TREATMENT	continuous automatic filtration and disinfection with ozone and UV lamp.

### PRODUCT SPECS

VOLTAGE	230 Vac
FREQUENCY	50 Hz - 60 Hz
POWER RATING	10,86 A
MAXIMUM POWER	2500 Watt - the power must always remain active to maintain the temp. constant